

# KeypadLinc™ V2 Frame and LED Color Change Kit Replacement Steps

For Models:

KeypadLinc Color Frame Kits:

2401AL	Almond
2401BK	Black
2401BR	Brown
2401GY	Gray

2401L	KeypadLinc V2 LED Multi-Color Kit
-------	-----------------------------------



I N S T E O N

## Introduction

Depending on the kit purchased, the installer or end-user can easily change the KeypadLinc V2 frame color or the colors of the indicators under the buttons. The frame and colored diffusers can be changed before or after the KeypadLinc is installed in the wall. However, it is easier to do the changes prior to installing the KeypadLinc.

During the changeover process, the power and the load may remain on and operating. There are no dangerous voltages or unsafe areas while the button plate is removed.

The color frame kit is compatible with older versions of the KeypadLinc made after 2002. Earlier KeypadLinc models with an all-plastic body cannot use the frame kit.

## Kit Contents

### Frame Color Change Kits:


- Two same-color outside frames that replace the white frame originally installed on a KeypadLinc
- Four extra screws

### LED Color Change Kit:

- Eight small and two large tinted diffusers in each of the following colors:  
Green, Blue, Red, and Amber
- Four extra screws

## Disassembling the KeypadLinc

1. If the KeypadLinc is installed in the wall, remove the trim plate.
2. Remove the four Phillips screws that hold the frame and buttons to the metal bracket.
3. Pull the entire frame straight away from the switch. Also pull away the button plate assembly (the plastic pieces the button caps are attached to). You may have to wiggle the bottom of the frame to get it free of the bottom Set Button.

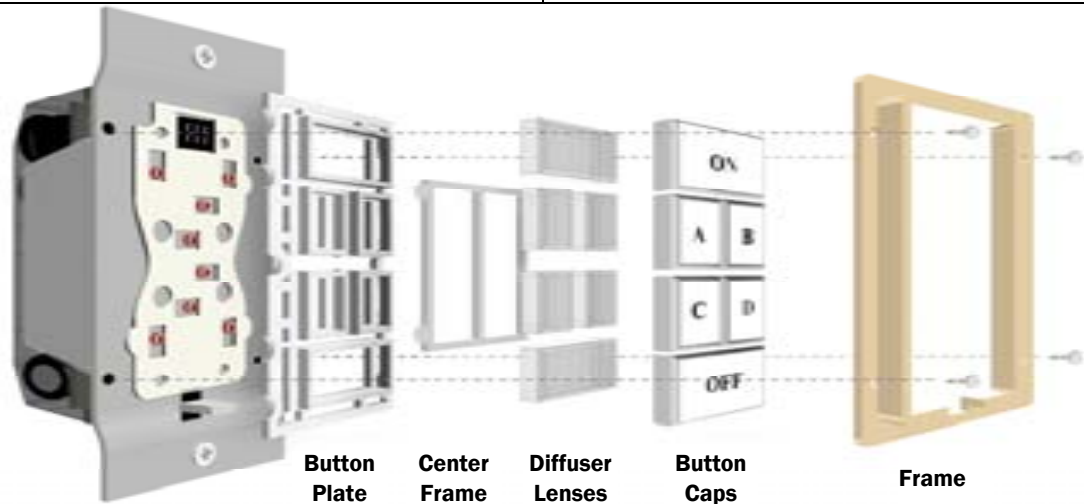

## Frame Replacement Only

If only the frame is being changed to a different color, the button plate and caps easily separates between the old frame and onto the new one.

### **Please note:**

**No matter which color frame is used, the white button plate and center frame will continue to be used. There are not separate color parts to replace these pieces. When paper labels are installed, users will not notice the under-button structure or its color.**

## Colored Lens Diffusers

1. Remove the frame if not already done so.
2. Remove the plastic button caps by gently prying under one corner of the cap.
3. Remove the existing diffuser.
4. Install the new tinted diffuser lens into the button plate until the front surface is flush.
5. Snap the button cap back onto the button plate.

## Installing the Frame onto the Button Plate Assembly

1. Before installing the frame on to the button plate assembly, take a moment to insure that both are correctly aligned. Remove the frame if not already done so.
2. On the backside of the frame, there are several protrusions that will align up with the button plate.
3. Align the bottom of the frame with the two holes in the bottom corners of the Button Plate.
4. Place the frame and button plate assembly onto the KeypadLinc and reinstall the four screws.

## Smarthome Limited Warranty


Smarthome warrants to the original consumer purchaser of this product that, for a period of two years from the date of purchase, this product will be free from defects in material and workmanship and will perform in substantial conformity to the description of the product in this Owner's Manual. This warranty shall not apply to defects or errors caused by misuse or neglect. If the product is found to be defective in material or workmanship or if the product does not perform as warranted above during the warranty period, Smarthome will either repair it, replace it or refund the purchase price, at its option, upon receipt of the product at the address below, postage prepaid, with proof of the date of purchase and an explanation of the defect or error. The repair, replacement, or refund that is provided for above shall be the full extent of Smarthome's liability with respect to this product.

For repair or replacement during the warranty period, call Smarthome customer service to receive an RA# (return authorization number), properly package the product (with the RA# clearly printed on the outside of the package) and send the product, along with all other required materials to:

**Smarthome - ATTN: Receiving Dept.**  
16542 Millikan Ave. Irvine, CA 92606-5027

SwitchLinc, KeypadLinc, SignaLinc, LampLinc, PowerLinc, ToggleLinc, BoosterLinc, ApplianceLinc, ControLinc, TesterLinc, FilterLinc, ProbeLinc, TempLinc, TouchLinc, IR Linc, Insteon, SignaLinc RF, & SmarthomeLive are trademarked by Smarthome, Inc.

© Copyright 2005 SmartHome, Inc. 800.SMART.HOME - 949.221.9200  
rev 062105 [www.smarthome.com](http://www.smarthome.com)

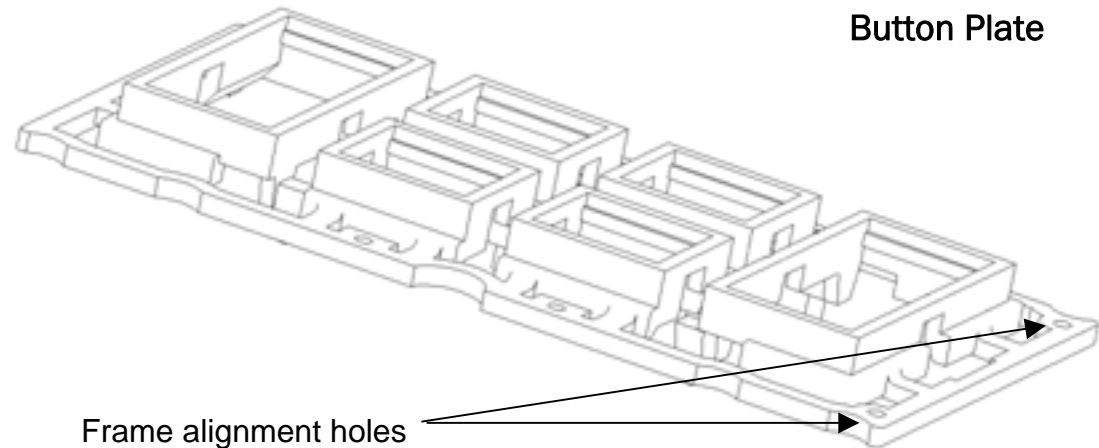

Button Plate

Frame alignment holes