


Cat&Dog STOP!



1 How it works

1. Motion sensor detects cat in the field of view.
2. The unit triggers a 2 second ultrasonic burst.
3. A red light indicates that the Cat&Dog stop! unit has been triggered.




2 Why it works

1. Unlike many pest deterrents that operate continuously, the CatStop unit waits for the animal to be in range.
2. Internal sensor detects the crossing of a warm body in the field of view.
3. Powerful ultrasonic sound burst startles the animal.
4. The animal equates the location with an unpleasant occurrence.
5. The animal avoids the location.

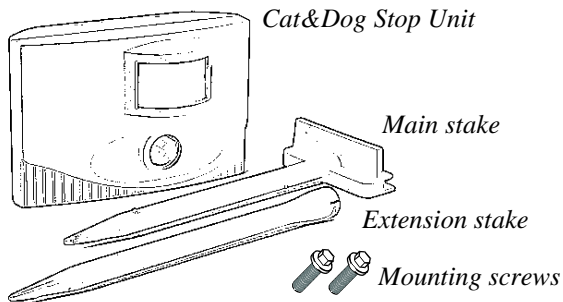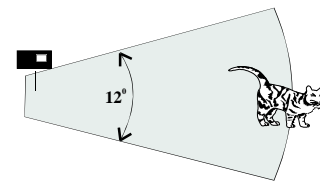


3 Installing battery

1. Remove the battery door.
2. Install a fresh 9 volt alkaline battery.
3. Close the battery door.
4. Wait 60 seconds, the Cat&Dog Stop! is now ready to protect.
5. The red light stays on for 2 seconds indicating that the unit has been triggered.
6. Replace the battery when the red light does not light.




Caution: Do not press against lens.

4 Place the unit

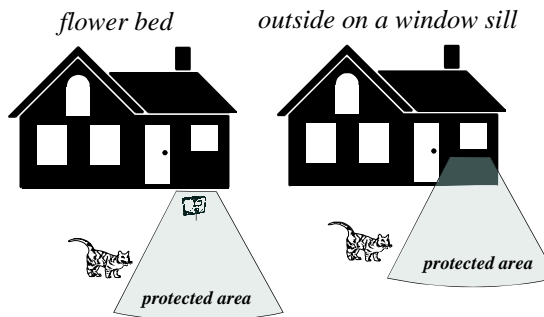

5 Using mounting stakes

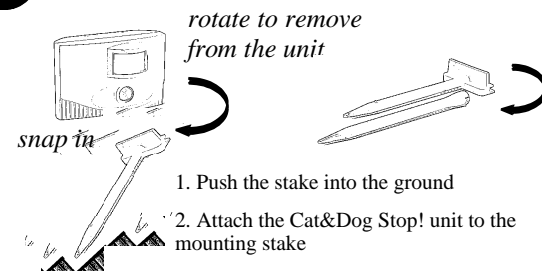


1. Push the stake into the ground
2. Attach the Cat&Dog Stop! unit to the mounting stake
3. Use the extension stake if more height is needed; snap together to lock.
4. Twist and pull apart stakes to unlock.

6 Fixed mounting

Wall Mount:

1. Use template to locate screw location (provided below).
2. Drive in screws (provided) leaving 1/4" gap.
3. Line up the screw heads with keyholes.
4. Hang the Cat&DogStop unit using the keyholes on the back of the unit.



1.954" (template to scale)

Technical specifications

- I.R. viewing angle = 80 degrees, two horizontal vertical angles 0 and 12 degrees.
- Detection range is up to 20 feet.
- Area of protection is 330 square feet.
- Battery life = up to 4,900 activations (20 per day = 245 days).
- Output stabilization = less than 3 dB reduction in SPL down to 5.5 volts.
- I.R. sensor warm up time = 60 seconds.
- Power supply = 9 volt battery (alkaline only).
- Output SPL at one foot = 124 dB.
- Standby current drain = 10 uA.
- Red LED for showing when unit is activated.
- Unit on time when activated = 2 seconds.
- Output frequency = sweeping from 21 - 25 KHZ.
- Fully water resistant.
- Includes two stakes for versatile mounting (ground level, approximately 4" above ground and approximately 10" above ground).

Cautions

- Do not point toward anyone's ear.
 - Do not press against lens.
- Note: some white cats, older cats and exotic breeds are by nature hard of hearing in the upper hearing range and may not be affected.**